




## ICS Fire Rated Standard Magnet

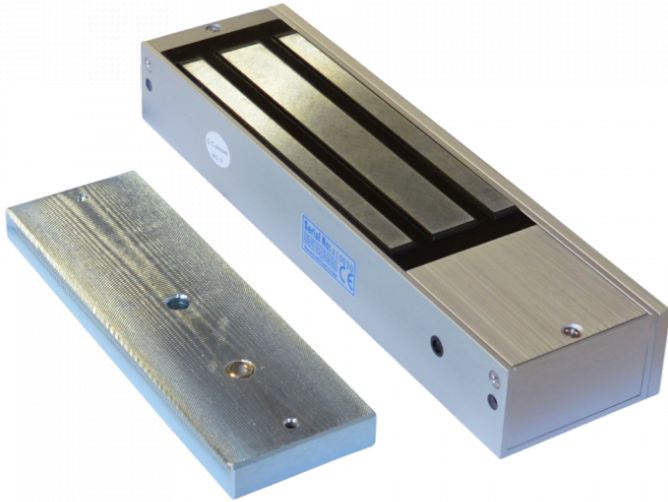

### Description

---

Fire rated standard magnet by ICS security, suitable for FD30 and FD60 fire doors, with an operating voltage of 12 or 24 Vdc. This magnet is available either monitored or non monitored, with a holding force of 544kg and an operating temperature between -10°C & 55°C (14°F & 131°F).



1 Year Guarantee



60 Minute Fire Rating



Complies To BS EN  
1634



Fire Tested



Electronically  
Monitored


### Features

---


- Fail-safe
- Double magnet
- Humidity 0 to 95% non-condensing
- 12 or 24 Vdc operating voltage
- Aluminium housing
- 544Kg holding force

# Product Table

---



**L30070**  
FR-A10010 Non Monitored



**L30071**  
FR-A10020 Monitored