




ICS Fire Rated Mini Magnet

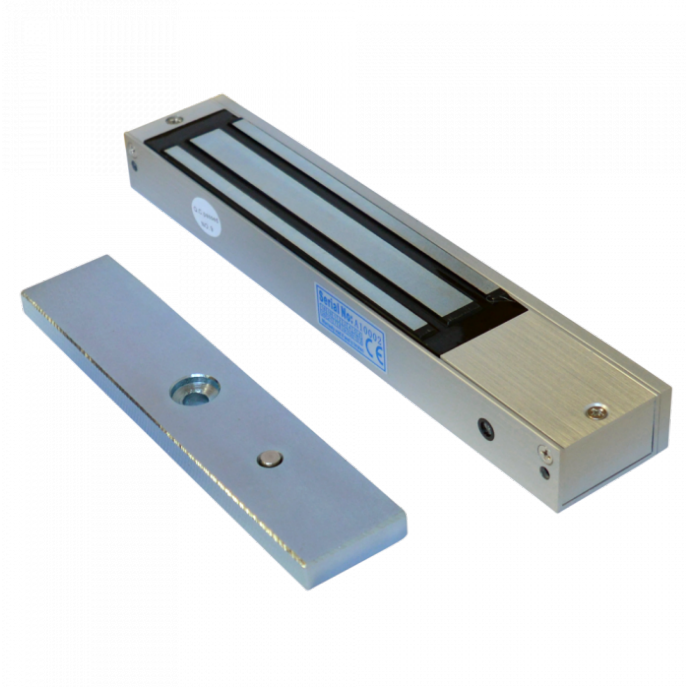

Description

Fire rated mini magnet by ICS security, suitable for FD30 and FD60 fire doors, with an operating voltage of 12 or 24 Vdc. This magnet is available as either monitored or non monitored, with a holding force of 272kg (600lbs) and an operating temperature between -10°C & 55°C (14°F & 131°F).



1 Year Guarantee



60 Minute Fire Rating



Complies To BS EN
1634



Fire Tested



Electronically
Monitored

Features

- 12 or 24 Vdc operating voltage
- Monitored or non monitored available
- Aluminium housing
- Fail-safe
- 272Kg holding force

Product Table

The image shows a magnetic lock assembly consisting of a silver-colored rectangular base and a blue rectangular strike plate. The base has a black magnetic strip on its front face. The strike plate is blue with a silver-colored mounting bracket and a single screw hole.

L30066
FR-A10001 Non Monitored

The image shows a magnetic lock assembly consisting of a silver-colored rectangular base and a blue rectangular strike plate. The base has a black magnetic strip on its front face. The strike plate is blue with a silver-colored mounting bracket and a single screw hole.

L30067
FR-A10002 Monitored