




ASEC Standard Double Magnet

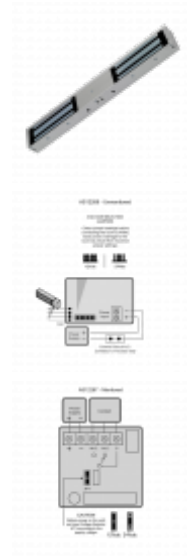

Description

Designed for double door applications, this surface mounted Asec standard double magnet is available monitored or unmonitored. The input voltage is switchable between 12V DC or 24 V DC and it has a holding force up to 1200lbs (544kg) per door.



Electronically Monitored

Features

- Monitored version - Magnetic bond sensor monitor output remotely monitors the door lock or unlock status (N.C output - door opened; N.O output - door closed. (SPDT rated 0.25a at 12Vdc)
- LED Status (Red/Green) - Monitored version
- Fail Safe - Power to lock
- Aluminium
- Surface mounted
- Operating voltage 12/24Vdc (Selectable)
- Holding force up to 1200lbs (544kg) per door

Product Table



AS12267
12/24VDC Monitored



AS12266
12/24VDC Unmonitored